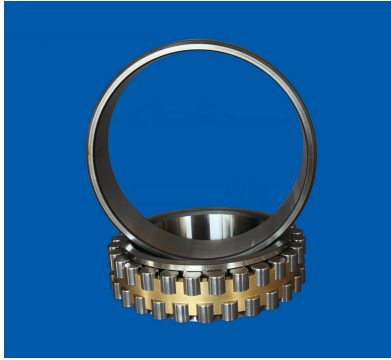


Bearing NO.

Cylindrical bore : NN30/500

Tapered bore : NN30/500K

Boundary dimensions(mm)

d : 500

D : 720

B/C : 167

r 1.2min : 6

r3.4min : 6

Basic load ratings(kN)

Cr : 2580

Cor : 5600

Limiting speed(rpm)

Speed Ratings : 1100

Abutment and fillet dimensions(mm)

da max : -

Da max : 694

ra max : 5

rb max : 5

Weight (kg)

Refer : 210